

# DuPont™ Ti-Pure®

## TITANIUM DIOXIDE

### APPLICATION GUIDE FOR PLASTIC END USES

Finished Product	Grade						
	R-101	R-102	R-103	R-104	R-105*	R-350	R-960*
Polyethylene/Polypropylene							
Injection Molding	●	●	●	●		◆	
Blow Molding	●	●	●	●		◆	
Blown Film	●	●	●	●		◆	
Cast Film	●	●	●	●		◆	
High-Temperature Cast Film or Extrusion Coating	◆			◆		◆	
Exterior, Durable*					◆		●
Liquid Colorants		◆	●				
PVC							
Interior, Rigid	●	◆	●	●			
Exterior, Chalking	●	◆	●	●			
Exterior, Nonchalking					◆		◆
Flexible	●	◆	●		●		
Plastisol		◆	●		●		●
Lead-Stabilized Systems			●		◆		●
Pipe**	●	◆	●	●			
ABS		●	●	●		◆	●
Polystyrene	●	●	◆	◆			●
Polycarbonate	For Polycarbonate we recommend PCx01 or PCx02***						
Polyamide	●	●	●	●			●
Polyester	For Polyester we recommend PETx***						
Thermoset (PES)	●	●	●	●			●

- ◆ Preferred grade for application
- Grade fully usable for application

\* Grades R-105 and R-960 are maximum durability grades and recommended for all applications that require extended outdoor service life.

\*\* Grades R-101, R-102, R-103, R-104, R-700, and R-900 are listed with the NSF International for plastic pipe use.

\*\*\*For information on these products consult your local sales representative.




The miracles of science™

## Plastics Grades TiO<sub>2</sub> Physical Properties

Property	Grade						
	R-101	R-102	R-103	R-104	R-105	R-350	R-960
TiO <sub>2</sub> , wt%, min.	97	96	96	97	92	95	89
Alumina, wt%, max.	1.7	3.2	3.2	1.7	3.2	1.7	3.5
Silica, wt%, max.	N/A	N/A	N/A	N/A	3.5	3.0	6.5
Organic Treatment	hydrophilic	hydrophilic	hydrophilic	hydrophobic	hydrophobic	hydrophobic	N/A
Color CIE L*, min.	97.9	98.5	97.8	97.5	98.5	98.5	98.5
Specific Gravity	4.2	4.1	4.1	4.2	4.0	4.1	3.9
Vinyl Tint Strength	102/110	109	110	110	105	110	90
Vinyl Undertone	-0.040/0.005	0.035	0.035	0.030	-0.010	0.030	-0.030
pH	8.0/8.5	7.5	6.5	N/A	N/A	N/A	7.4
Resistance, min.	2.0	2.0	4.0	N/A	N/A	N/A	4.0

**Notes:** Unless noted, values are typical. Resistance is reported as the minimum value in k ohm-cm. Test methods used to determine the values reported are available from your TiO<sub>2</sub> sales or technical service representative.

**Figure 1. Titanium Dioxide Plastics Optical Properties**

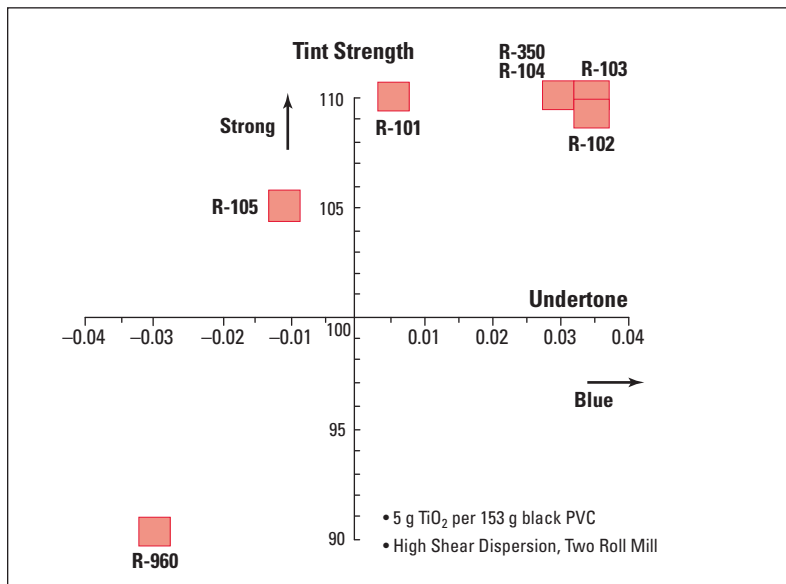

DuPont Titanium Technologies

[www.titanium.dupont.com](http://www.titanium.dupont.com)

Copyright © 2007 DuPont. The DuPont Oval Logo, DuPont™, The miracles of science™, and Ti-Pure® are registered trademarks or trademarks of DuPont or its affiliates. All rights reserved.

H-88379-9 (03/07) Printed in the U.S.A.

The information set forth herein is furnished free of charge and based on technical data that DuPont believes to be reliable. It is intended for use by persons having technical skill, at their own risk. Because conditions of use are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. Nothing herein is to be taken as license to operate under or a recommendation to infringe any patents.



The miracles of science™